

CANTONI
MOTOR



***Multi-Speed
Three-Phase
Induction
Motors***

***Including Motors for
Fan Applications***



ISO9001



Product Catalogue

Certificates

Cantoni Motor SA
ISO 9001
KEMA
Since: September 30, 1999
Number: 99515

Besel SA
ISO 9001
DQS
Since: July 21, 1995
Number: 002887Q1

Indukta SA
ISO 9001
KEMA
Since: April 1, 1993
Number: 99501
ISO 14001
KEMA
Since: June 1, 2001
Number: 99651

Celma SA
ISO 9001
Germanischer Lloyd
Since: June 16, 1995
Number: QS-243 HH
ISO 14001
Germanischer Lloyd
Since: November 15, 1999
Number: EM-1835 HH

Emit SA
ISO 9001
Polish Register of Ships
Since: January 23, 1997
Number: NC-034/00





Cantoni Motor S.A.
Pańska 81/83, 00-834 Warsaw, Poland
tel.: +48 22 652 84 05
fax: +48 22 652 84 00
e-mail: motor@cantonimotor.com.pl
<http://www.cantonimotor.com.pl>

od roku 1950



od roku 1878



od roku 1954



od roku 1920



od roku 1921



DESCRIPTION OF THE CATALOGUE VERSION

Application	general industrial, centrifugal machines
Duty	S1
Rated voltage	400V
Frequency	50 Hz
Ambient temperature	from -15°C to +40°C
Mounting height	up to 1000 m above sea level
Number of free shaft ends	1
Insulation class	F
Degree of protection	IP 55

DESCRIPTION OF THE CUSTOMIZED VERSION

Different duty type	
Different supply voltage	
Frequency	60 Hz
Number of free shaft ends	2
Insulation class	H
Degree of protection	IP 56
Tropicalization	
Other versions per customer's specifications	

ORDERING INFORMATION

When placing an order, the following motor data should be given:

Motor type designation
Rated outputs
Rated speeds
Operating duty
Supply voltage
Frequency
Mounting arrangements
Degree of protection
Special requirements

Information concerning additional accessories e.g.

Thermal protection
Anticondensation heaters
Vibration sensors, etc.

When ordering spare parts the following data should be given:

Full motor type designation including its serial number
Degree of protection
Mounting arrangement
Name of spare part
Number of pieces

As part of our development program, we reserve the right to alter or amend any of the specifications included in this catalogue without giving prior notice.

This catalogue covers industrial squirrel cage multi-speed motors for general application as well as for driving centrifugal machines such as fans.

Our motors are designed for long life and reliable operation in severe industrial applications.

All the motors are manufactured in Quality Assurance System consistent with ISO 9001.

ISO9001

Multi-speed motors can be applied where a rough grading of speed is acceptable. In these motors the operation at two or more fixed speeds is obtained by changing the magnetic poles.

Multi-speed motors can be either single winding - Dahlander connection where speed ratio is 2 to 1 or with two separate windings where speed ratio other than 2 to 1 can be obtained. Single winding motors are designed for direct starting from the supply and are single voltage.

All the motors described in the present catalogue are provided with CE mark. It means that our products are consistent with the European Union directives regarding the safety measures.

CE

for fan

In this catalogue the motors designed especially for driving centrifugal machines are marked **(for fan)**. In these motors the power at higher speed is much larger than at lower speed. It is because the torque demanded for this kind of applications varies as the square of the speed.

The other motors can be used in applications with constant torque requirements such as mixers, conveyors.

General technical information such as type of bearings, mounting arrangements, construction is the same as for standard motors and is described in catalogue: "General Purpose 3-Phase Induction Motors". This catalogue contains also dimensional drawings of motors.

The motors covered by this catalogue comply with the IEC 60034-1 standard as well as standards effective in other countries, consistent with IEC.

IEC

This catalogue describes the most widely used multi-speed motors. Other types - for different fixed speeds can be supplied according to customer's specifications.



Two-Speed Motors 1500/3000 rpm


Totally Enclosed Motors IP 55
Insulation Class F

(for fan) - motors designed for fan application


Item	Type	Number of poles	Connection diagram	Rated output		Rated speed	Rated torque	Efficiency	Power factor	Full load current	Locked rotor torque	Locked rotor current	Breakdown torque	Moment of inertia	Weight (IMB3)										
				P _N												n _N	T _N	η _N	cos φ _N	I _N [400V]	T _L /T _N	I _L /I _N	T _B /T _N	J	m
				[kW]	[HP]											[rpm]	[Nm]	[%]	[-]	[A]	[-]	[-]	[-]	[kgm ²]	[kg]
2p=4/2 n _s =1500/3000 rpm																									
1.	Sh 71-4/2A	4	Δ	0,21	0,28	1400	1,43	58	0,6	0,95	1,6	3,2	2	0,000606	4,9										
		2	YY	0,28	0,37	2800	0,96	50	0,7	1,25	1,6	3,2	1,8												
2.	Sh 71-4/2AW (for fan)	4	Y	0,07	0,09	1400	0,48	58	0,68	0,3	2,2	2,9	1,4	0,000606	4,9										
		2	YY	0,28	0,37	2800	0,96	50	0,7	1,25	2,1	2,7	2,3												
3.	Sh 71-4/2B	4	Δ	0,3	0,4	1400	2,05	68	0,6	1,2	2	3,9	2,1	0,00077	6,1										
		2	YY	0,45	0,6	2820	1,52	60	0,67	1,7	1,7	4	1,9												
4.	Sh 71-4/2BW (for fan)	4	Y	0,12	0,16	1370	0,84	65	0,7	0,4	1,4	2,8	1,6	0,00077	6,1										
		2	YY	0,5	0,67	2800	1,71	60	0,67	1,9	1,6	3,5	2												
5.	Sh 71-4/2C	4	Δ	0,5	0,67	1360	3,51	68	0,7	1,6	1,9	3,3	2	0,001099	7,8										
		2	YY	0,7	0,94	2790	2,4	64	0,74	2,2	1,4	3,7	2												
6.	Sh 80-4/2A	4	Δ	0,45	0,6	1360	3,16	59	0,72	1,5	1,5	2,6	1,5	0,001578	7,8										
		2	YY	0,6	0,8	2740	2,09	60	0,83	1,9	1,5	2,6	1,6												
7.	Sh 80-4/2AW (for fan)	4	Y	0,15	0,2	1380	1,04	64	0,78	0,5	1,5	3,8	1,6	0,001578	7,8										
		2	YY	0,7	0,94	2730	2,45	61	0,84	2,2	1,5	3	1,6												
8.	Sh 80-4/2B	4	Δ	0,75	1	1360	5,23	69	0,78	2,1	1,7	3,1	1,8	0,001874	10,2										
		2	YY	0,95	1,27	2780	3,26	70	0,8	2,5	1,9	3,8	2												
9.	Sh 80-4/2BW (for fan)	4	Y	0,25	0,32	1370	1,75	50	0,5	0,7	1,6	3,0	1,7	0,001874	10,2										
		2	YY	1,00	1,27	2780	3,44	70	0,8	2,4	1,9	3,8	2												
10.	Sh 90S-4/2	4	Δ	1,1	1,5	1410	7,45	72	0,81	2,8	1,6	4,4	2,1	0,0023	14										
		2	YY	1,4	1,9	2785	4,8	73,1	0,89	3,1	1,7	4,5	2,1												
11.	Sh 90S-4/2W (for fan)	4	Y	0,33	0,44	1420	2,2	64,6	0,86	0,9	1,5	3,9	1,1	0,0023	14										
		2	YY	1,4	1,9	2725	4,91	66,2	0,93	3,3	1,6	3,9	2,1												
12.	Sh90L-4/2	4	Δ	1,4	1,9	1405	9,52	73,7	0,8	3,4	1,8	4,4	2,2	0,0028	16,2										
		2	YY	2	2,7	2750	6,94	74,3	0,91	4,3	1,6	4,4	2,2												
13.	Sh 90L-4/2W	4	Y	0,5	0,67	1420	3,36	73,2	0,85	1,2	1,8	4,5	2,9	0,0026	16,5										
		2	YY	2	2,7	2775	6,88	73,9	0,91	4,3	1,8	4,7	2,5												
14.	PSH 90L-4/2 ¹⁾ (for fan)	4	Δ	1,6	2,1	1405	10,9	73,7	0,85	3,7	1,9	5	2,1	0,0148	21,5										
		2	YY	2,4	3,2	2780	8,24	82,6	0,94	4,5	1,4	4,8	2												

¹⁾- mounting and overall dimensions are the same as for "Motors with Increased Rated Output".

Highest output at both speeds, Dahlander connection



Centrifugal drive, Dahlander connection

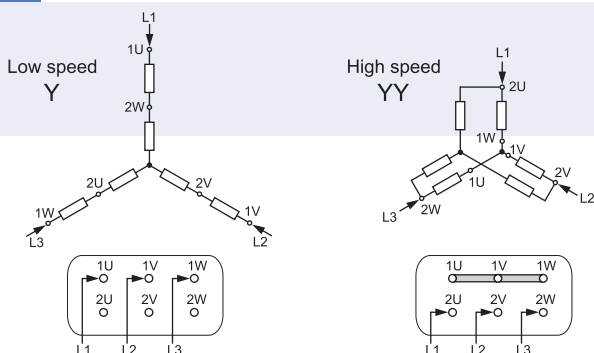

Two-Speed Motors
1500/3000 rpmTotally Enclosed Motors IP 55
Insulation Class F


(for fan) - motors designed for fan application

Item	Type	Number of poles	Connection diagram	Rated output		Rated speed	Rated torque	Efficiency	Power factor	Full load current	Locked rotor torque	Locked rotor current	Breakdown torque	Moment of inertia	Weight (IMB3)
				P _N		n _N	T _N	η _N	cos φ _N	I _N [400V]	T _L /T _N	I _L /I _N	T _b /T _N	J	m
				[kW]	[HP]	[rpm]	[Nm]	[%]	[-]	[A]	[-]	[-]	[-]	[kgm²]	[kg]
2p=4/2 n _s =1500/3000 rpm															
15.	Sg 100L-4/2A	4	Δ	2	2,7	1395	13,7	77,5	0,88	4,2	1,6	4,8	2,1	0,006	25
		2	YY	2,6	3,5	2810	8,8	76,9	0,92	5,3	1,8	4,7	2,4		
16.	Sg 100L-4/2AW (for fan)	4	Y	0,7	0,94	1400	4,8	72,8	0,89	1,5	1,3	3,75	2,3	0,007	23,1
		2	YY	2,6	3,5	2810	8,8	76,9	0,92	5,3	1,8	4,7	2,4		
17.	Sg100L-4/2B	4	Δ	2,5	3,4	1380	17,3	77,9	0,89	5,2	1,7	4,8	2	0,0065	27
		2	YY	3,3	4,4	2785	11,3	78	0,92	6,7	1,8	4,9	2,2		
18.	Sg 100L-4/2BW (for fan)	4	Y	0,85	1,14	1380	5,9	73,4	0,9	1,9	1,3	4,1	1,8	0,0082	24,3
		2	YY	3,3	4,4	2795	11,3	76,8	0,91	6,7	1,8	5,1	2,2		
19.	Sg112M-4/2	4	Δ	3,3	4,4	1435	22	83,3	0,85	6,7	2,2	6,9	2,7	0,0119	33
		2	YY	4,5	6	2865	15	81,7	0,88	9	2,2	5,9	2,6		
20.	Sg 112M-4/2W (for fan)	4	Y	1,2	1,6	1445	7,9	79,6	0,87	2,5	1,8	6,3	2,9	0,0119	32,8
		2	YY	4,8	6,4	2860	16	78,4	0,84	10,5	2,3	6,2	2,7		
21.	Sg 132S-4/2	4	Δ	4,7	6,3	1445	31,1	84	0,87	9,3	1,6	5,6	2,3	0,029	61
		2	YY	5,7	7,6	2895	18,8	78	0,92	11,5	1,7	6,1	2,4		
22.	Sg 132S-4/2W (for fan)	4	Y	1,3	1,7	1470	8,4	83,8	0,82	2,8	1,8	7	3	0,027	57
		2	YY	5,2	7	2910	17,1	77	0,87	11,2	2,2	6,7	2,9		
23.	Sg 132S-4/2WB (for fan)	4	Y	1,5	2	1450	9,9	75,7	0,87	3,3	5,3	1,5	3,6	0,021	47
		2	YY	5,9	7,9	2895	19,5	76,7	0,87	12,7	1,7	6,1	3		
24.	Sg 132M-4/2	4	Δ	6	8	1450	39,5	85	0,86	11,8	1,7	6	2,5	0,0343	70
		2	YY	7,2	9,7	2915	23,6	80,5	0,92	14	1,8	7	2,7		
25.	Sg 132M-4/2W (for fan)	4	Y	1,8	2,4	1470	11,7	85	0,82	3,7	2,2	7,5	3,4	0,035	65
		2	YY	7,1	9,5	2930	23,1	79,7	0,88	14,6	2,3	7,9	3,1		
26.	Sg 132M-4/2WB (for fan)	4	Y	2	2,7	1460	13,1	79,2	0,87	4,2	1,7	6,2	3,5	0,026	56
		2	YY	8	10,7	2915	26,2	79,9	0,86	16,7	1,8	6,5	3		
27.	PSg 132M-4/2 ¹⁾	4	Δ	7,5	10	1455	49,2	85,4	0,86	14,8	2,1	7	2,8	0,042	81
		2	YY	10	13	2920	32,7	83,2	0,92	18,8	2,1	7,9	2,7		
28.	Sg 160M-4/2	4	Δ	10	13	1450	65,9	87,3	0,84	19,7	1,8	6,2	2,5	0,061	110
		2	YY	12	16	2900	39,5	85	0,92	22,1	1,7	6,7	2,5		
29.	Sg 160M-4/2W (for fan)	4	Y	2,7	3,6	1470	17,5	85,5	0,8	5,7	1,9	7	3,2	0,062	105
		2	YY	11	15	2920	36	84,4	0,9	20,9	2	7,4	2,9		
30.	Sg 160 M-4/2Q (for fan)	4	Δ	3	4	1470	19,5	86	0,82	6,2	1,8	6,6	3,1	0,062	102
		2	ΔΔ	10,5	14	2930	34,2	84	0,9	20	2,1	7,7	3,2		
31.	Sg 160L-4/2	4	Δ	13	17	1455	85,3	88	0,85	25,1	2	6,8	2,6	0,075	130
		2	YY	16	21	2915	52,4	86,4	0,92	29,1	2	7,6	2,7		
32.	Sg 160L-4/2W (for fan)	4	Y	4	5,4	1470	26	87,3	0,84	7,9	1,9	6,9	3	0,076	122
		2	YY	15	20	2930	48,9	86,6	0,9	27,7	2,1	8,3	3		
33.	Sg 160L-4/2Q (for fan)	4	Δ	4	5,4	1470	26	86	0,83	8,1	2,1	7,1	3,2	0,076	122
		2	ΔΔ	15	20	2940	48,7	85	0,91	28	2,2	8,4	3,3		

¹⁾- mounting and overall dimensions are the same as for "Motors with Increased Rated Output".

Highest output at both speeds, Dahlander connection

Centrifugal drive, Dahlander connection

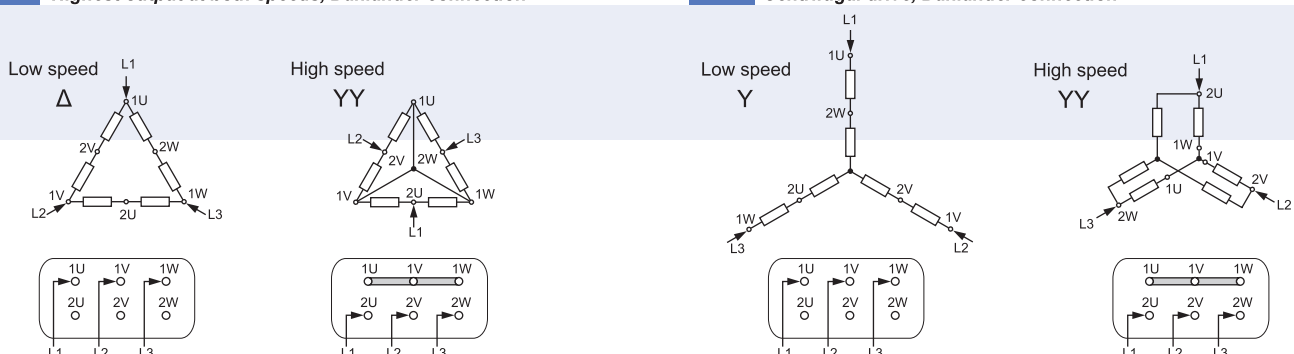

Two-Speed Motors 1500/3000 rpm



Totally Enclosed Motors IP 55
Insulation Class F

(for fan) - motors designed for fan application

Item	Type	Number of poles	Connection diagram	Rated output		Rated speed	Rated torque	Efficiency	Power factor	Full load current	Locked rotor torque	Locked rotor current	Breakdown torque	Moment of inertia	Weight (IMB3)
				P _N											
				[kW]	[HP]										
2p=4/2															

Highest output at both speeds, Dahlander connection

Centrifugal drive, Dahlander connection

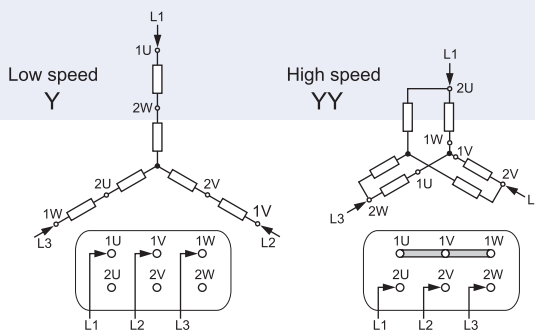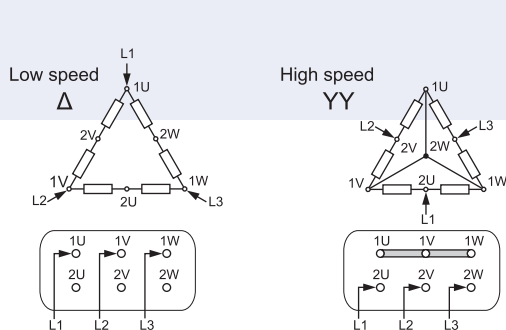

Two-Speed Motors 1000/1500 rpm

**Totally Enclosed Motors IP 55
Insulation Class F**


(for fan) - motors designed for fan application

	Item	Type	Number of poles	Connection diagram	Rated output		Rated speed	Rated torque	Efficiency	Power factor	Full load current	Locked rotor torque	Locked rotor current	Breakdown torque	Moment of inertia	Weight (IMB3)		
					P _N		η _N	T _N	η _N	cos φ _N	I _N [400V]	T _L /T _N	I _L /I _N	T _b /T _N	J	m		
					[kW]	[HP]	[rpm]	[Nm]	[%]	[-]	[A]	[-]	[-]	[-]	[kgm²]	[kg]		
					2p=6/4		n _s =1000/1500 rpm											
	52.	Sh 71-6/4A	6	Y	0,06	0,08	940	0,61	35	0,7	0,5	1,5	2	1,9	0,000736	4,9		
			4	Y	0,18	0,24	1400	1,23	45	0,7	1,1	1,5	2,2	1,9				
	53.	Sh 71-6/4B	6	Y	0,18	0,24	880	1,95	50	0,8	0,8	1,3	2,1	1,4	0,000946	6		
			4	Y	0,25	0,34	1350	1,77	50	0,9	1,0	1,1	2,2	1,4				
	54.	Sh 71-6/4C	6	Y	0,25	0,34	900	2,65	60	0,72	0,9	1,7	2,5	1,8	0,001221	7,4		
			4	Y	0,37	0,5	1420	2,49	60	0,74	1,4	1,7	3,3	1,9				
	55.	Sh 80-6/4A	6	Y	0,12	0,16	960	1,19	42	0,55	0,8	1,7	2,5	2,6	0,001693	7,5		
			4	Y	0,37	0,5	1390	2,54	59	0,8	1,2	1,4	2,7	1,6				
	56.	Sh 80-6/4B	6	Y	0,18	0,24	970	1,77	50	0,5	0,9	2,0	3,0	2,6	0,00207	8,6		
			4	Y	0,55	0,74	1380	3,81	68	0,8	1,4	1,4	3,0	1,6				
	57.	Sh 80-6/4C	6	Y	0,25	0,34	950	2,51	52	0,7	1	1,3	2,7	1,8	0,002933	11		
			4	Y	0,75	1	1410	5,08	66	0,8	2	1,5	3,3	1,9				
	58.	Sh 90S-6/4	6	Y	0,63	0,84	950	6,33	63,7	0,67	2,2	2	3,7	2,2	0,0025	15,4		
			4	Y	0,9	1,21	1425	6,03	66,5	0,78	2,5	1,5	4,1	2,4				
	59.	Sh 90L-6/4	6	Y	0,70	0,94	935	7,15	63,0	0,74	2,2	1,6	3,6	2,0	0,0032	16,7		
			4	Y	1,10	1,50	1410	7,45	67,7	0,83	2,9	1,4	4,2	2,5				
	60.	Sh 90S-6/4W for fan	6	Y	0,28	0,37	950	2,81	62,9	0,72	0,9	2,1	4	2,3	0,0025	13,8		
			4	Y	0,8	1,07	1410	5,42	66,9	0,85	2,1	1,3	4	1,8				
	61.	Sh 90L-6/4W for fan	6	Y	0,37	0,5	945	3,74	59,2	0,77	1,1	1,6	3,5	2,8	0,0032	16,7		
			4	Y	1,1	1,5	1410	7,45	67,7	0,83	2,9	1,3	4,2	2,4				
	62.	Sg 100L-6/4A	6	Y	0,9	1,21	960	8,95	65,5	0,7	2,9	1,7	4,2	2,6	0,0088	21,5		
			4	Y	1,3	1,7	1440	8,62	68,2	0,77	3,5	1,5	4,9	2,6				
	63.	Sg 100L-6/4AW for fan	6	Y	0,6	0,8	950	6,03	58,1	0,76	2	1,3	3,4	2,1	0,0088	23,8		
			4	Y	1,7	2,3	1410	11,5	71,6	0,83	4,2	1,4	4,3	2,2				
	64.	Sg 100L-6/4B	6	Y	1,2	1,6	960	11,9	73	0,74	3,2	1,8	4,8	2,7	0,0094	26		
			4	Y	1,7	2,3	1435	11,3	74	0,82	4,1	1,4	4,5	2,3				
	65.	Sg 100L-6/4BW for fan	6	Y	0,75	1	965	7,42	64,2	0,72	2,4	1,5	4,2	2,7	0,0094	24,6		
			4	Y	2,2	2,9	1425	14,7	74,1	0,82	5,2	1,2	4,5	2,2				
	66.	Sg 112M-6/4	6	Y	1,6	2,1	965	15,8	77,7	0,72	4,2	2,3	5,8	2,9	0,0178	34		
			4	Y	2,4	3,2	1445	15,9	79,3	0,8	5,4	1,5	5,6	2,6				
	67.	Sg 112M-6/4W for fan	6	Y	0,9	1,21	975	8,82	73	0,69	2,6	2,1	5,5	3,0	1,0178	33,3		
			4	Y	3	4	1420	20,2	78,4	0,84	6,6	1,6	5,3	2,3				


TECHNICAL DATA

Two separate windings, centrifugal drive or highest output at both speeds

Low speed



High speed



Two-Speed Motors

1000/1500 rpm

Totally Enclosed Motors IP 55
Insulation Class F



(for fan) - motors designed for fan application

Item	Type	Number of poles	Connection diagram	Rated output		Rated speed	Rated torque	Efficiency	Power factor	Full load current	Locked rotor torque	Locked rotor current	Breakdown torque	Moment of inertia	Weight (IMB3)
				P _N		n _N	T _N	η _N	cos φ _N	I _N [400V]	T _L /T _N	I _L /I _N	T _b /T _N	J	
				[kW]	[HP]	[rpm]	[Nm]	[%]	[-]	[A]	[-]	[-]	[-]	[kgm²]	m
2p=6/4 n _s =1000/1500 rpm															
68.	Sg 132S-6/4	6	Y	2,5	3,4	970	24,6	77	0,74	6,4	1,8	5,3	2,6	0,0319	60
		4	Y	3,5	4,7	1440	23,2	81	0,89	7	1,6	5,5	2		
69.	Sg 132S-6/4W for fan	6	Y	1,2	1,6	940	12,2	69,3	0,86	2,9	1,2	3,8	2	0,031	56
		4	Y	3,4	4,6	1450	22,4	80	0,87	7	1,6	5,8	2,3		
70.	Sg 132S-6/4Q for fan	6	Y	1,4	1,9	945	14,1	72	0,86	3,3	1,2	4,3	1,8	0,031	56
		4	Y	4,2	5,6	1430	14,7	77	0,88	8,9	1,4	5,1	2		
71.	Sg 132M-6/4	6	Y	3,1	4,2	965	30,7	79,3	0,76	7,4	1,8	5,7	2,7	0,0399	70
		4	Y	4,7	6,3	1445	31,1	81,7	0,88	9,4	1,6	5,7	2,5		
72.	Sg 132M-6/4W for fan	6	Y	1,7	2,3	950	17,1	75,5	0,86	3,8	1,3	4,7	2	0,039	67
		4	Y	4,5	6	1450	29,6	82,7	0,88	8,9	1,7	6	2,3		
73.	Sg 132M-6/4Q for fan	6	Y	2	2,7	960	19,9	76	0,83	4,6	1,3	5	2	0,039	67
		4	Y	5,9	7,9	1435	39,3	82	0,87	12	1,5	5,9	2,3		
74.	Sg 160M-6/4	6	Y	5,2	7	965	51,5	83,2	0,82	11	1,8	6,2	2,4	0,07	110
		4	Y	7,4	9,9	1450	48,7	84,9	0,88	14,3	1,7	6,5	2,4		
75.	Sg 160M-6/4W for fan	6	Y	2,5	3,4	930	25,7	75,1	0,86	5,6	1	3,3	1,5	0,069	95
		4	Y	6,7	9	1450	44,1	82,2	0,86	13,7	1,6	6,5	2,5		
76.	Sg 160M-6/4Q for fan	6	Y	3,3	4,4	980	32,2	73	0,64	10,2	2	6,6	3,5	0,069	95
		4	Y	9,4	12,6	1430	62,8	82	0,89	18,5	1,2	4,7	1,9		
77.	Sg 160L-6/4	6	Y	7	9,4	970	68,9	85	0,79	15	2,3	7,3	2,9	0,097	135
		4	Y	10,8	14	1450	71,2	86,8	0,88	20,4	1,9	7,2	2,8		
78.	Sg 160L-6/4W for fan	6	Y	3,3	4,4	950	33,2	79,2	0,86	6,9	1,3	4,3	2,1	0,097	125
		4	Y	10	13	1455	65,6	85	0,85	19,9	2,4	7,9	3,1		
79.	Sg 160L-6/4Q for fan	6	Y	4,4	5,9	965	43,5	78	0,83	9,9	1,6	6,1	2	0,097	125
		4	Y	12	16	1425	80,4	80	0,91	24,2	1	4,6	2		
80.	Sg 180L-6/4	6	Y	8,5	11,4	985	82,4	84,2	0,8	18,2	2,6	6,8	2,8	0,19	165
		4	Y	13	17	1470	84,5	85,4	0,89	24,7	2,2	6,5	2,3		
81.	Sg 180L-6/4W for fan	6	Y	6,2	8,3	970	61	82	0,88	12,4	1,7	4,8	1,8	0,19	165
		4	Y	13	17	1470	84,5	85,4	0,89	24,7	2,2	6,5	2,3		
82.	Sg 180L-6/4Q for fan	6	Y	5	6,7	980	48,7	81,6	0,88	10,1	1,9	5,3	2,1	0,19	165
		4	Y	14,5	19	1465	94,5	86,7	0,9	26,8	2,1	6,2	2,3		

Two separate windings, centrifugal drive or highest output at both speeds



Low speed

Y



High speed

Y



Two-Speed Motors 1000/1500 rpm

**Totally Enclosed Motors IP 55
Insulation Class F**

(for fan) - motors designed for fan application



	Item	Type	Number of poles	Connection diagram	Rated output		Rated speed	Rated torque	Efficiency	Power factor	Full load current	Locked rotor torque	Locked rotor current	Breakdown torque	Moment of inertia	Weight (IMB3)		
					P _N		η _N	T _N	η _N	cos φ _N	I _N [400V]	T _L /T _N	I _L /I _N	T _b /T _N	J	m		
					[kW]	[HP]	[rpm]	[Nm]	[%]	[-]	[A]	[-]	[-]	[-]	[kgm²]	[kg]		
					2p=6/4		n _s =1000/1500 rpm											
	83.	Sg 200L6/4	6	Y	16	21	985	155	86	0,89	30	1,5	6,4	2,5	0,47	260		
			4	Y	23	31	1473	149	87	0,91	42	1,5	6,4	2,3				
	84.	Sg 200L6/4 for fan	6	Y	9	12,1	980	87	84	0,9	17	1,7	6,4	2,5	0,47	260		
			4	Y	26	35	1470	169	88,5	0,92	46	1,6	5,5	2,2				
	85.	Sg 225S6/4	6	Y	21	28	985	204	88	0,86	40	2,5	7,6	2,9	0,76	330		
			4	Y	30	40	1470	195	89	0,93	52	1,7	6,4	2,4				
	86.	Sg 225S6/4 for fan	6	Y	12	16	988	116	87,5	0,88	22	2,1	7	2,6	0,76	330		
			4	Y	33	44	1473	214	91,4	0,92	56	1,5	5,7	2,2				
	87.	Sg 225M6/4	6	Y	25	34	990	241	87,5	0,79	52	3	7,8	3,1	0,87	365		
			4	Y	35	47	1480	226	90	0,9	62	2	7,2	1,9				
	88.	Sg 225M6/4 for fan	6	Y	13	17	989	126	88,1	0,88	25	2,3	7,7	2,9	0,87	365		
			4	Y	37	50	1479	239	91,7	0,91	65	1,8	6,7	2,6				
	89.	Sg 250M6/4	6	Y	30	40	993	289	87,3	0,82	61	2,1	7,8	3,5	1,4	455		
			4	Y	45	60	1485	289	89,8	0,9	80	2,8	8,4	3,9				
	90.	Sg 250M6/4 for fan	6	Y	15	20	985	145	86,7	0,91	27	1,9	5,7	2,2	1,4	455		
			4	Y	45	60	1478	291	92,4	0,93	75	2,1	6,7	2,6				
	91.	Sg 280S6/4	6	Y	45	60	990	434	90,6	0,9	80	2,8	8,5	2,6	1,65	575		
			4	Y	65	87	1480	419	91,8	0,93	110	1,7	6,7	1,9				
	92.	Sg 2806/4 for fan	6	Y	22	29	983	214	88,3	0,91	39	1,9	5,5	2,1	1,65	575		
			4	Y	65	87	1480	419	93,6	0,92	108	1,8	6,6	2,5				
	93.	Sg 280M6/4	6	Y	52	70	988	503	91,6	0,88	93	3,2	8,7	3	2,3	645		
			4	Y	77	103	1482	496	92,5	0,92	131	1,8	7	1,9				
	94.	Sg 280M6/4 for fan	6	Y	25	34	984	243	89,2	0,91	44	2	5,8	2,2	2,3	645		
			4	Y	75	100	1481	484	94	0,93	123	1,9	6,8	2,6				
	95.	Sg 315M6/4B	6	Y	75	100	989	724	91,3	0,86	138	1,9	6,9	2,7	4,4	985		
			4	Y	90	121	1485	579	91,5	0,9	158	1,4	6,3	2,6				
	96.	Sg 355S6/4	6	Y	90	121	992	866	92,5	0,86	163	1,6	6,2	2,2	7,5	1330		
			4	Y	125	168	1484	804	92,8	0,9	217	1,1	4,8	2				
	97.	Sg 355M6/4A	6	Y	100	134	991	964	93	0,88	177	1,8	5,8	2,1	9	1550		
			4	Y	150	201	1486	964	93,1	0,91	256	1,3	5,3	2,1				
	98.	Sg 355M6/4A	6	Y	110	147	989	1062	92,7	0,88	195	1,5	5,6	2	9	1550		
			4	Y	160	214	1485	1029	93,1	0,91	273	1,3	5,1	2				

TECHNICAL DATA

Two separate windings, centrifugal drive or highest output at both speeds



Low speed

Y



High speed

Y



Two-Speed Motors


750/1500 rpm

Totally Enclosed Motors IP 55
Insulation Class F


(for fan) - motors designed for fan application

Item	Type	Number of poles	Connection diagram	Rated output		Rated speed	Rated torque	Efficiency	Power factor	Full load current	Locked rotor torque	Locked rotor current	Breakdown torque	Moment of inertia	Weight (IMB3)										
				P _N												η _N	T _N	η _N	cos φ _N	I _N [400V]	T _L /T _N	I _L /I _N	T _b /T _N	J	m
				[kW]	[HP]											[rpm]	[Nm]	[%]	[-]	[A]	[-]	[-]	[-]	[kgm²]	[kg]
2p=8/4 n _s =750/1500 rpm																									
99.	Sh 71-8/4AW (for fan)	8	Y	0,06	0,08	680	0,84	40	0,75	0,3	1,5	2	1,7	0,000736	5										
		4	YY	0,18	0,24	1420	1,21	60	0,66	0,7	1,5	2,3	1,4												
100.	Sh 71-8/4BW (for fan)	8	Y	0,09	0,12	680	1,26	40	0,75	0,45	1,5	2	1,6	0,000946	6										
		4	YY	0,25	0,34	1430	1,67	50	0,65	1,2	1,5	4	1,6												
101.	Sh 80-8/4A	8	Δ	0,22	0,29	670	3,14	46	0,68	1,3	1,5	2	1,6	0,001693	7,3										
		4	YY	0,4	0,54	1350	2,83	60	0,87	1,1	1,5	2,8	1,5												
102.	Sh 80-8/4AW (for fan)	8	Y	0,12	0,16	670	1,71	45	0,6	0,7	1,5	2,3	1,9	0,001693	7,3										
		4	YY	0,5	0,67	1350	3,54	59	0,78	1,4	1,5	2,8	1,5												
103.	Sh 80-8/4B	8	Δ	0,3	0,4	660	4,34	48	0,64	1,5	1,5	2	1,5	0,00207	8,6										
		4	YY	0,55	0,74	1350	3,89	64	0,89	1,4	1,5	2,7	1,5												
104.	Sh 80-8/4BW (for fan)	8	Y	0,15	0,2	660	2,17	56	0,66	0,7	1,5	2,3	1,5	0,00207	8,6										
		4	YY	0,7	0,94	1350	4,95	68	0,84	1,75	1,5	2,7	1,5												
105.	Sh 90S-8/4	8	Δ	0,37	0,5	705	5,01	55,2	0,55	1,7	2,1	3	2,3	0,0025	14,9										
		4	YY	0,75	1	1385	5,17	72,9	0,87	1,7	1,5	4,2	1,8												
106.	Sh 90S-8/4W (for fan)	8	Y	0,23	0,31	700	3,14	55	0,66	0,9	1,6	2,8	2,2	0,0025	14,7										
		4	YY	1	1,3	1405	6,8	69,9	0,81	2,6	1,5	4,2	2,1												
107.	Sh 90L-8/4	8	Δ	0,55	0,74	695	7,56	62,1	0,61	2,1	1,8	3,0	2	0,0027	16,6										
		4	YY	1	1,3	1380	6,92	74,7	0,88	2,2	1,4	3,9	2												
108.	Sh 90L-8/4W (for fan)	8	Y	0,33	0,44	685	4,6	61,2	0,68	1,1	1,6	2,9	2,1	0,0028	16,8										
		4	YY	1,3	1,7	1400	8,87	73	0,81	3,1	1,9	4,7	2,7												
109.	Sg 100L-8/4W (for fan)	8	Y	0,44	0,59	680	6,18	63,8	0,74	1,3	1,2	2,7	1,9	0,0094	25,7										
		4	YY	1,8	2,4	1400	12,3	75,2	0,88	3,9	1,5	4,5	1,9												
110.	Sg 100L-8/4A	8	Δ	0,7	0,94	715	9,35	64,2	0,57	2,8	2,2	3,6	2,8	0,0088	23,8										
		4	YY	1,25	1,7	1425	8,38	77,7	0,86	2,8	1,7	5,1	2,5												
111.	Sg 100L-8/4AW (for fan)	8	Y	0,5	0,67	690	6,92	62,5	0,72	1,6	1,4	3,1	2,3	0,0088	22,1										
		4	YY	2	2,7	1400	13,6	72,7	0,84	4,8	1,6	4,4	2,3												
112.	Sg 100L-8/4B	8	Δ	0,9	1,21	715	12	67	0,59	3,2	2,2	4	3,1	0,0094	26										
		4	YY	1,7	2,3	1415	11,5	76,5	0,87	3,7	1,3	5,1	2,3												
113.	Sg 100L-8/4BW (for fan)	8	Y	0,65	0,87	685	9,06	64,4	0,73	2	1,3	2,9	1,8	0,0094	23,6										
		4	YY	2,6	3,5	1405	17,7	72,5	0,87	6	1,5	4,6	2												
114.	Sg 112M-8/4	8	Δ	1,6	2,1	715	21,4	74,4	0,6	5,1	2,5	4,6	2,8	0,018	33										
		4	YY	3	4	1415	20,2	80,3	0,86	6,3	1,4	5,4	2,2												
115.	Sg 112M-8/4W (for fan)	8	Y	0,75	1	700	10,2	71,8	0,75	2	1,4	3,3	1,9	0,0178	32,7										
		4	YY	3	4	1415	20,2	78,9	0,86	6,4	1,5	5,4	2,2												
116.	Sg 112M-8/4BW (for fan)	8	Y	0,9	1,21	700	12,3	70,9	0,74	2,5	1,6	3,8	2,2	0,018	39,3										
		4	YY	3,6	4,8	1420	24,2	78,5	0,85	7,8	1,7	5,8	2,5												

Highest output at both speeds, Dahlander connection

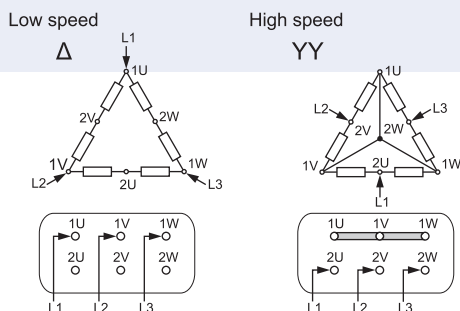

Centrifugal drive, Dahlander connection

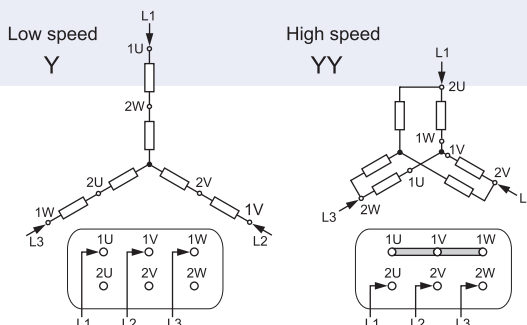

Two-Speed Motors
750/1500 rpmTotally Enclosed Motors IP 55
Insulation Class F

(for fan) - motors designed for fan application







Item	Type	Number of poles	Connection diagram	Rated output		Rated speed	Rated torque	Efficiency	Power factor	Full load current	Locked rotor torque	Locked rotor current	Breakdown torque	Moment of inertia	Weight (IMB3)
				P _N											
				[kW]	[HP]										
				2p=8/4 n _s =750/1500 rpm											
117.	Sg 132S-8/4	8	Δ	2,5	3,4	710	33,6	77,5	0,67	6,9	1,9	4,6	2,5	0,0319	62
		4	YY	4,2	5,6	1410	28,4	81,6	0,91	8,2	1,5	5,1	2,2		
118.	Sg 132S-8/4W for fan	8	Y	1	1,3	700	13,6	72,3	0,75	2,7	1,3	3,6	2	0,031	56
		4	YY	4	5,4	1420	26,9	80,4	0,9	8	1,6	5,3	2		
119.	Sg 132S-8/4WB for fan	8	Y	1,1	1,5	705	14,9	70,3	0,74	3	1,3	4	2,8	0,025	46
		4	YY	4,5	6	1415	30,4	78,1	0,88	9,5	1,7	5,6	2,6		
120.	Sg 132M-8/4	8	Δ	3,2	4,3	710	43	78,6	0,67	8,7	1,9	4,7	2,6	0,0399	73
		4	YY	5,4	7,2	1415	36,4	82,4	0,91	10,4	1,7	5,4	2,3		
121.	Sg 132M-8/4W for fan	8	Y	1,4	1,9	700	19,1	74,6	0,75	3,6	1,3	3,6	1,9	0,04	66
		4	YY	5,3	7,1	1420	35,6	82,8	0,9	10,3	1,7	6	2,3		
122.	Sg 132M-8/4WB for fan	8	Y	1,4	1,9	720	18,6	74,1	0,69	4	1,7	4,8	3,1	0,04	56
		4	YY	6,1	8,4	1435	40,6	80,7	0,84	13	2,3	6,7	2,8		
123.	Sg 160M-8/4	8	Δ	4,7	6,3	725	61,9	82,7	0,63	13	2	5,4	2,9	0,07	105
		4	YY	8,4	11,3	1435	55,9	86,1	0,91	15,5	1,7	6,2	2,4		
124.	Sg 160M-8/4W for fan	8	Y	2	2,7	710	26,9	81,4	0,75	4,8	1,1	3,8	1,9	0,067	95
		4	YY	7,8	10,5	1420	52,5	83,8	0,9	14,9	1,6	5,8	2,3		
125.	Sg 160M-8/4Q for fan	8	Y	1,1	1,5	730	14,4	82	0,65	4	1,3	3,7	1,8	0,061	110
		4	Y	8	10,7	1460	52,3	82	0,85	16,6	1,2	5,2	2,2		
126.	Sg 160L-8/4	8	Δ	7,2	9,7	720	95,5	83,9	0,64	19,4	2,1	5,6	2,9	0,096	130
		4	YY	12	16	1440	79,6	87,3	0,9	22	1,9	7,2	2,7		
127.	Sg 160L-8/4W for fan	8	Y	3	4	710	40,4	82,6	0,74	7,1	1,3	4,2	2,1	0,097	125
		4	YY	11,5	15	1440	76,3	86	0,9	21,5	1,9	7,1	2,8		
128.	Sg 160L-8/4Q for fan	8	Y	1,5	2	740	19,4	82	0,54	7,9	1,7	3,9	2,8	0,075	130
		4	Y	11	15	1465	71,7	85	0,86	21,8	1,3	5,8	2,6		
129.	Sg 180L-8/4	8	Δ	10	13	730	131	85	0,7	24,2	2,3	5,2	2,1	0,22	165
		4	YY	15,8	21	1460	103	86	0,9	29,5	2	6,1	2,1		
130.	Sg 180L-8/4W for fan	8	Y	3,9	5,2	730	51	86	0,77	8,5	1,7	4,2	1,8	0,22	165
		4	YY	15,8	21	1460	103	86	0,9	29,5	2	6	2,1		
131.	Sg 180L-8/4Q for fan	8	Y	2,2	2,9	740	28,4	75,6	0,62	6,7	2	4,6	2,8	0,155	175
		4	Y	15	20	1475	97,1	88,5	0,89	27,6	2,8	8,4	3,4		
132.	Sg 200L8/4	8	Δ	17	23	740	219	85,2	0,72	40	2,7	6	2,7	0,47	255
		4	YY	27	36	1470	175	87,6	0,92	48,5	1,8	6,9	2,4		
133.	Sg 200L8/4 for fan	8	Y	7	9,4	735	90,9	84,5	0,81	14,8	1,8	5,2	2,3	0,47	255
		4	YY	28	38	1470	182	89,7	0,84	54	2,1	6,3	2,6		
134.	Sg 225S8/4	8	Δ	22	29	738	285	88,5	0,77	47	2,1	5,8	2,3	0,76	330
		4	YY	32	43	1475	207	89	0,92	56	1,4	6,2	2,3		
135.	Sg 225S8/4 for fan	8	Y	8	10,7	740	103	89,5	0,8	16	1,9	5,8	2,4	0,76	330
		4	YY	32	43	1480	207	92,6	0,91	55	2,2	7,3	2,8		
136.	Sg 225M8/4	8	Δ	26	35	738	337	89,5	0,77	55	2,4	6,3	2,4	0,87	335
		4	YY	37	50	1475	240	90,5	0,93	64	1,8	7,1	2,1		
137.	Sg 225M8/4 for fan	8	Y	9	12,1	740	116	89,8	0,81	18	1,8	5,5	2,2	0,87	335
		4	YY	36	48	1475	233	92,7	0,92	61	2,1	7,1	2,6		

TECHNICAL DATA

Highest output at both speeds, Dahlander connection

Centrifugal drive, Dahlander connection

Two separate winding, centrifugal drive



Two-Speed Motors

750/1500 rpm

Totally Enclosed Motors IP 55
Insulation Class F


(for fan) - motors designed for fan application

Item	Type	Number of poles	Connection diagram	Rated output		Rated speed	Rated torque	Efficiency	Power factor	Full load current	Locked rotor torque	Locked rotor current	Breakdown torque	Moment of inertia	Weight (IMB3)										
				P _N												η _N	T _N	η _N	cos φ _N	I _N [400V]	T _L /T _N	I _L /I _N	T _b /T _N	J	m
				[kW]	[HP]											[rpm]	[Nm]	[%]	[-]	[A]	[-]	[-]	[-]	[kgm²]	[kg]
2p=8/4 n _s =750/1500 rpm																									
138.	Sg 250M8/4	8	Δ	34	46	737	441	90,5	0,82	66	2,2	5,5	2	1,4	450										
		4	YY	49	66	1478	317	90,5	0,94	83	1,9	6,5	2,5												
139.	Sg 250M8/4 (for fan)	8	Y	12	16	740	155	90,4	0,83	23	1,9	5,1	2,1	1,4	450										
		4	YY	48	64	1480	310	92,8	0,91	82	2,3	7,4	2,8												
140.	Sg 280S8/4	8	Δ	46	62	738	595	91,5	0,78	93	2,2	5,8	2,4	1,65	540										
		4	YY	60	80	1480	387	92,2	0,92	102	1,8	6,5	2,2												
141.	Sg 280S8/4 (for fan)	8	Y	15	20	740	194	90,1	0,82	29	1,7	5	2,1	1,65	540										
		4	YY	60	80	1480	387	93,4	0,92	101	1,7	6,2	2,4												
142.	Sg 280M8/4	8	Δ	60	80	733	782	91,1	0,81	117	1,7	5,0	1,8	2,15	620										
		4	YY	80	107	1475	518	92,6	0,93	134	1,6	6,3	2,1												
143.	Sg 280M8/4 (for fan)	8	Y	20	27	740	258	91	0,83	38	1,6	4,8	1,9	2,15	620										
		4	YY	80	107	1478	517	93,8	0,92	132	1,7	6,2	2,3												
144.	Sg 315M8/4	8	Δ	90	121	733	1173	92,4	0,8	176	2,1	5,4	1,7	2,86	880										
		4	YY	125	168	1471	812	93,3	0,93	208	1,7	5,5	2,1												
145.	Sg 315M8/4A (for fan)	8	Y	20	27	739	258	91,5	0,76	42	1,6	5	2	3,1	980										
		4	YY	75	100	1484	483	93	0,91	128	2,3	7,4	2,5												
146.	Sg 315M8/4B (for fan)	8	Δ	22	29	738	285	92	0,77	45	1,3	4,2	2	3,6	1030										
		4	YY	90	121	1483	580	92,4	0,91	156	2,2	6,3	2,2												
147.	Sg 315M8/4C	8	Y	70	94	739	905	92,7	0,72	151	1,8	5,2	2,5	5	1100										
		4	YY	110	147	1480	710	92,5	0,91	189	2	7	2,7												
148.	Sg 315M8/4C (for fan)	8	Δ	27	36	738	349	92,6	0,79	53	1,3	5	2	5	1100										
		4	YY	110	147	1480	710	92,5	0,91	189	2	7	2,7												
149.	Sg 315M8/4C (for fan)	8	Y	30	40	738	388	92,6	0,79	61	1,2	4,2	1,8	5	1100										
		4	YY	115	154	1483	741	93	0,92	194	1,9	6,9	2,4												
150.	Sg 315M8/4C (for fan)	8	Y	33	44	739	426	92,6	0,79	66	1,2	4,2	1,8	5	1100										
		4	YY	132	177	1481	851	93	0,92	194	1,9	6,9	2,4												
151.	Sg 355S8/4	8	Δ	110	147	742	1416	94,7	0,7	239	1,4	5,3	2,6	6,8	1640										
		4	YY	160	214	1488	1027	94,3	0,9	272	1,4	7	2,6												
152.	Sg 355S8/4 (for fan)	8	Y	37	50	744	475	94,6	0,79	72	1,3	5,4	2,5	5,3	1440										
		4	YY	160	214	1487	1028	94	0,88	279	1,4	7,2	2,7												
153.	Sg 355M8/4A	8	Y	120	161	741	1547	94,9	0,77	238	1,3	5,1	2,4	8	1750										
		4	YY	185	248	1486	1189	94,4	0,91	312	1,4	6,5	2,3												
154.	Sg 355M8/4A (for fan)	8	Y	45	60	744	578	95	0,8	86	1,1	5,1	2,3	6,8	1640										
		4	YY	185	248	1486	1189	94,4	0,9	314	1,5	7,3	2,7												
155.	Sg 355M8/4B	8	Δ	140	188	741	1804	95	0,77	276	1,3	5	2,3	8,5	1780										
		4	YY	200	268	1486	1285	94,6	0,91	335	1,4	7	2,5												
156.	Sg 355M8/4B (for fan)	8	Y	55	74	743	707	95,1	0,84	100	0,9	4,5	2	8,5	1780										
		4	YY	200	268	1486	1285	94,6	0,91	335	1,4	7	2,5												
157.	Sg 355L8/4	8	Δ	160	214	744	2054	94,7	0,77	344	1,5	5,6	2,4	10,59	1900										
		4	YY	250	335	1487	1606	94,9	0,91	418	1,6	7,5	2,7												
158.	Sg 355L8/4 (for fan)	8	Y	63	84	744	809	95,5	0,82	116	1	4,9	2,2	10,5	1900										
		4	YY	250	335	1487	1606	94,9	0,91	418	1,6	7,5	2,7												


Highest output at both speeds, Dahlander connection

Centrifugal drive, Dahlander connection


Low speed




High speed



Low speed



High speed







Two-Speed Motors
750/1000 rpmTotally Enclosed Motors IP 55
Insulation Class F

(for fan) - motors designed for fan application

Item	Type	Number of poles	Connection diagram	Rated output		Rated speed	Rated torque	Efficiency	Power factor	Full load current	Locked rotor torque	Locked rotor current	Breakdown Torque	Moment of inertia	Weight (IMB3)	
				P _N												
				[kW]	[HP]											
2p=8/6																

TECHNICAL DATA

Two separate windings, centrifugal drive or highest output at both speeds

Low speed
YHigh speed
Y

Two-Speed Motors

500/1000 rpm

Totally Enclosed Motors IP 55
Insulation Class F


(for fan) - motors designed for fan application

Item	Type	Number of poles	Connection diagram	Rated output		Rated speed	Rated torque	Efficiency	Power factor	Full load current	Locked rotor torque	Locked rotor current	Breakdown torque	Moment of inertia	Weight (IMB3)										
				P _N												n _N	T _N	η _N	cos φ _N	I _N [400V]	T _L /T _N	I _L /I _N	T _B /T _N	J	m
				[kW]	[HP]																				
2p=12/6 n _s =500/1000 rpm																									
175.	Sg 112M-12/6W (for fan)	12	Y	0,3	0,4	480	5,97	58,6	0,44	1,7	1,9	3,0	2,7	0,018	32										
		6	Y	1,6	2,1	970	15,8	77,5	0,66	4,5	2,9	6,4	3,0												
176.	PSg 132M-12/6	12	Δ	1,8	2,4	470	36,6	68,1	0,52	7,4	1,8	3,3	2,3	0,025	79										
		6	YY	4	5,4	940	40,6	80	0,85	8,5	1,4	4,9	2,1												
177.	Sg 160M-12/6	12	Δ	2,6	3,5	475	52,3	75	0,53	9,4	1,5	3,5	2,2	0,07	105										
		6	YY	5,5	7,4	950	55,3	83,4	0,85	11,2	1,4	5,1	2												
178.	Sg 160L-12/6	12	Δ	3,8	5,1	470	77,2	77,9	0,55	12,8	1,4	3,7	2,2	0,096	130										
		6	YY	7,70	10,3	950	77,4	85,3	0,86	15,1	1,6	5,5	2,2												
179.	Sg 225S12/6	12	Δ	10	13	496	193	80,3	0,51	35,2	2,7	5,3	2,6	0,77	330										
		6	YY	18,5	25	984	180	90,8	0,81	36,3	2,1	7,2	2,3												
180.	Sg 225M12/6	12	Δ	12	16	494	232	80,4	0,5	43	2,8	5,2	2,7	0,87	335										
		6	YY	22	29	986	213	91,1	0,82	42,5	2	7,3	2,4												
181.	Sg 280S12/6	12	Δ	21	28	492	408	87,3	0,63	55	2	4,4	2,2	1,47	510										
		6	YY	38	51	985	368	91	0,89	68	1,6	5,3	1,7												
182.	Sg 280M12/6	12	Δ	26	35	495	502	88,5	0,61	90	2,1	4,6	2,2	1,8	585										
		6	YY	44	59	990	424	92,2	0,9	77	2	6,5	2,2												
183.	Sg 315M12/6	12	Δ	33	44	495	637	90,2	0,53	100	2,6	5,2	2	2,86	880										
		6	YY	67	90	990	646	93,7	0,88	117	2,1	7,6	1,9												
184.	Sg 315M12/6C (for fan)	12	Y	20	27	494	387	90	0,6	53,7	1,5	4,6	2,4	5,5	1090										
		6	YY	110	147	990	1061	94	0,85	199	1,8	6,8	2,6												
185.	Sg 355M12/6A (for fan)	12	Y	35	47	496	674	92,5	0,61	77	1,4	4,4	2,1	9,3	1530										
		6	YY	180	241	991	1735	94,5	0,85	324	1,8	6,6	2,5												
186.	Sg 355M12/6B (for fan)	12	Y	40	54	495	772	91,3	0,62	103	1,4	4,5	2,1	11,7	1750										
		6	YY	200	268	992	1925	94,6	0,86	355	1,9	6,6	2,8												
187.	Sg 355M12/6B (for fan)	12	Y	45	60	495	868	93,2	0,62	112	1,3	4,3	2,1	11,7	1750										
		6	YY	235	315	991	2265	94,9	0,86	416	1,8	6,5	2,5												

Highest output at both speeds, Dahlander connection


Low speed

Δ



High speed


YY



Centrifugal drive, Dahlander connection


Low speed

Y



High speed

YY



Three-Speed Motors


1000/1500/3000 rpm

750/1500/3000 rpm


Totally Enclosed Motors IP 55
Insulation Class F

Item	Type	Number of poles	Connection diagram	Rated output		Rated speed	Rated torque	Efficiency	Power factor	Full load current	Locked rotor torque	Locked rotor current	Breakdown torque	Moment of inertia	Weight (IMB3)
				P _N		n _N	T _N	η _N	cos φ _N	I _N [400V]	T _L /T _N	I _L /I _N	T _b /T _N	J	m
				[kW]	[HP]	[rpm]	[Nm]	[%]	[-]	[A]	[-]	[-]	[-]	[kgm²]	[kg]
2p=6/4/2 n _s =1000/1500/3000 rpm															
188.	Sg 160M-6/4/2	6	Y	4	5,4	970	39,4	81,6	0,75	9,4	1,7	5,1	2,3	0,061	110
		4	Δ	6,2	8,3	1470	40,3	84,1	0,79	13,5	1,8	6,8	2,8		
		2	YY	7,7	10,3	2945	25	80,4	0,91	15,2	1,5	7	2,6		
189.	Sg 160L-6/4/2	6	Y	5,5	7,4	965	54,4	82,1	0,72	13,4	2	5,3	2,4	0,075	130
		4	Δ	8,3	11,1	1465	54,1	85,6	0,79	17,7	2	7,3	3,1		
		2	YY	10,9	15	2935	35,5	83,6	0,91	20,7	1,8	7,7	3,1		
2p=8/4/2 n _s =750/1500/3000 rpm															
190.	Sg 132S-8/4/2	8	Δ	1,5	2	725	19,8	71	0,62	4,9	1,9	4,7	2,7	0,026	60
		4	YY	2,2	2,9	1455	14,4	81	0,88	4,5	1,8	6,8	2,6		
		2	Y	2,8	3,8	2870	9,32	71,5	0,93	6,1	1,3	4,9	1,5		
191.	Sg 160M-8/4/2	8	Δ	2,7	3,6	725	35,6	76,4	0,64	8	1,6	3,9	2,2	0,061	110
		4	YY	5,3	7,1	1475	34,3	82,7	0,8	11,6	1,4	6,4	2,6		
		2	Y	7	9,4	2940	22,7	79,1	0,93	13,7	1,2	6,8	2,4		
192.	Sg 160L-8/4/2	8	Δ	3,7	5	720	49,1	78,3	0,66	10,4	1,7	4	2,1	0,075	130
		4	YY	7,4	9,9	1475	47,9	84,7	0,78	16,1	1,6	7,4	2,9		
		2	Y	9,6	12,9	2950	31,1	83	0,91	18,3	1,5	7,8	3		

1000/1500/3000 rpm: two separate windings, medium speed / high speed - Dahlander connection, highest output at all speeds

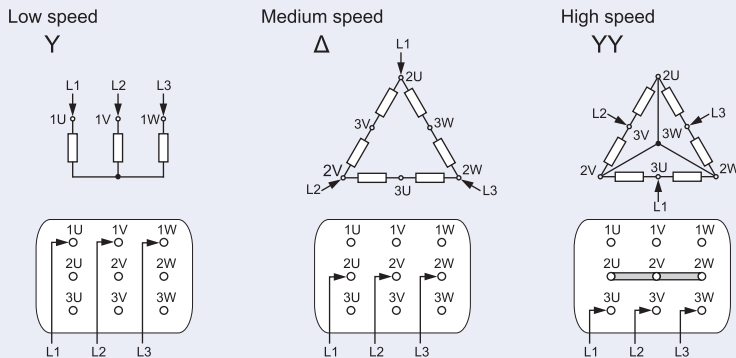

750/1500/3000 rpm: two separate windings, low speed / medium speed - Dahlander connection, highest output at all speeds

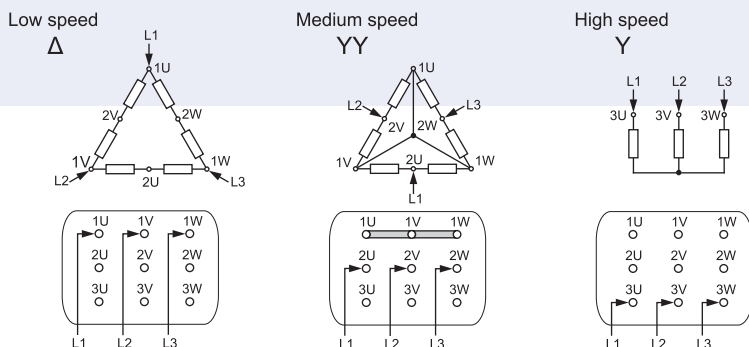


Three-Speed Motors

750/1000/1500 rpm

Totally Enclosed Motors IP 55
Insulation Class F

Item	Type	Number of poles	Connection diagram	Rated output		Rated speed	Rated torque	Efficiency	Power factor	Full load current	Locked rotor torque	Locked rotor current	Breakdown torque	Moment of inertia	Weight (IMB3)
				P _N		n _N	T _N	η _N	cos φ _N	I _N [400V]	T _L /T _N	I _L /I _N	T _b /T _N	J	m
				[kW]	[HP]	[rpm]	[Nm]	[%]	[-]	[A]	[-]	[-]	[-]	[kgm²]	[kg]
2p=8/6/4															

Two separate windings, low speed / high speed - Dahlander connection, highest output at all speeds

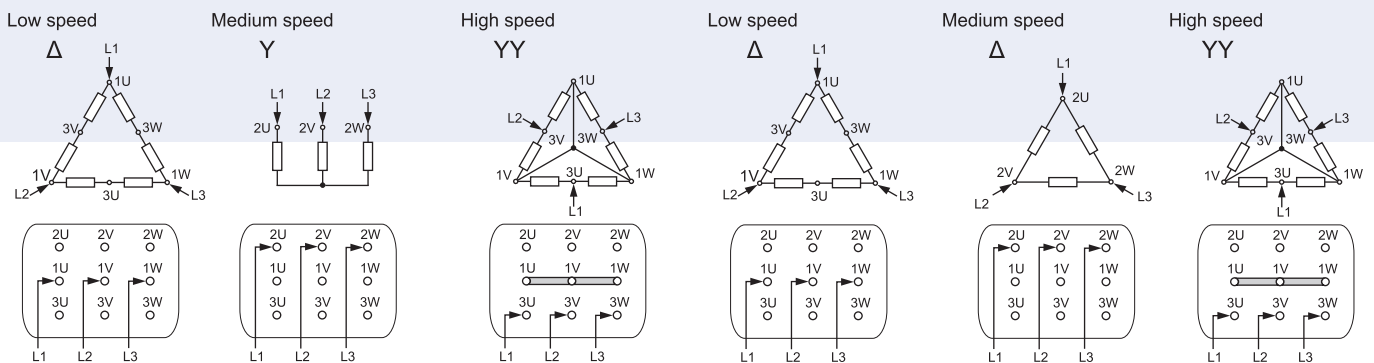

Four-Speed Motors


500/750/1000/1500 rpm

Totally Enclosed Motors IP 55
Insulation Class F


	Item	Type	Number of poles	Connection diagram	Rated output		Rated speed	Rated torque	Efficiency	Power factor	Full load current	Locked rotor torque	Locked rotor current	Breakdown torque	Moment of inertia	Weight (IMB3)
					P _N		η _N	T _N	η _N	cos φ _N	I _N [400V]	T _L /T _N	I _L /I _N	T _b /T _N	J	m
					[kW]	[HP]	[rpm]	[Nm]	[%]	[-]	[A]	[-]	[-]	[-]	[kgm²]	[kg]
	2p=12/8/6/4															

Two separate windings, highest output at all speeds,
low speed / medium-higher speed - Dahlander connection, medium-lower speed / high speed - Dahlander connection,


Low speed

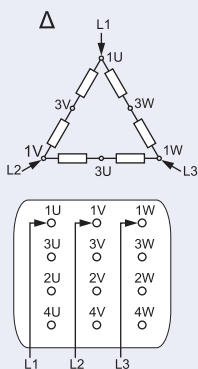


Medium-lower speed

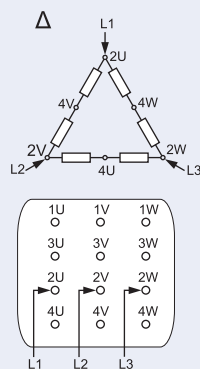

Medium-higher speed

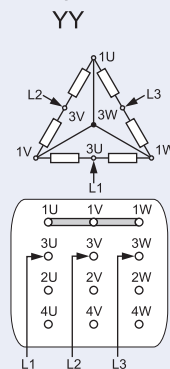

High speed

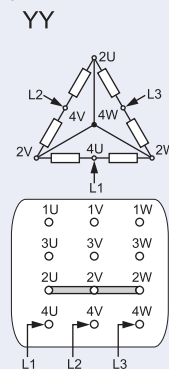

Performance data placed on rated plates of the motors may be different from catalogue data as a result of number roundings.

CANTONI
MOTOR



Cantoni Motor S.A.

Pańska 81/83

00-834 Warsaw, Poland

tel. +48 22 652 84 05

fax +48 22 652 84 00

e-mail: motor@cantonimotor.com.pl

<http://www.cantonimotor.com.pl>